



FT 221/1




MATERIALS

BODY	CARBON STEEL
CONTROL STEM	CHROME-PLATED STEEL
BALL	CHROME-PLATED STEEL
STEM SEAL	NITRILE
BALL SEAL	PTFE

EXAMPLE FOR ORDERING

CODE	TYPE
FT 221/1	34

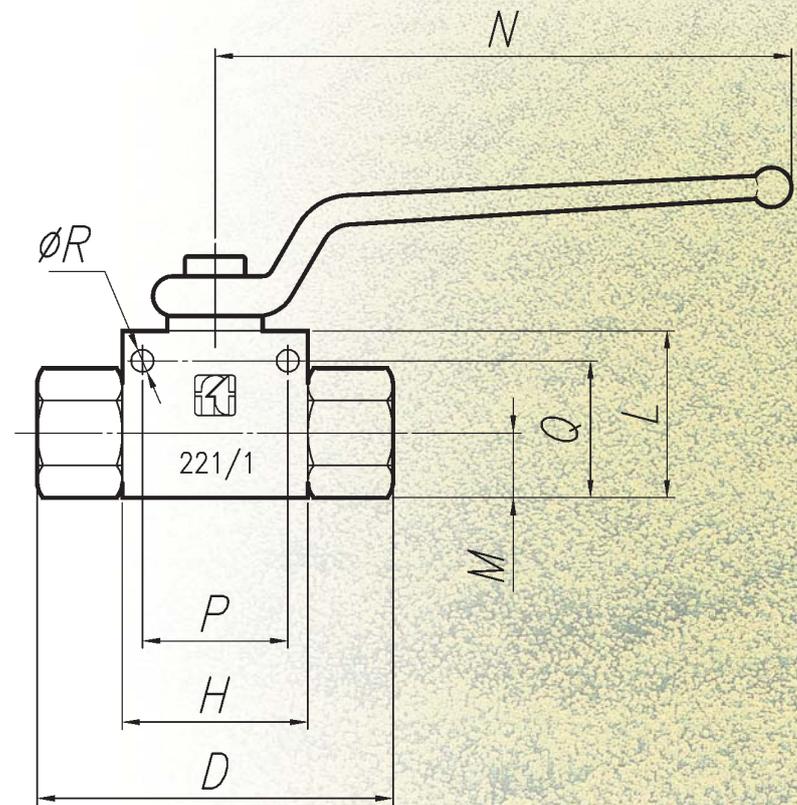



HIGH PRESSURE TWO-WAY BALL VALVES

Used to obtain a quick flow shut-off, avoiding noticeable pressure drop, the FT 221/1 ball valves are designed to obtain perfect sealing, easy and quick operation under high pressure conditions.


Working pressure up to 500 bar and with every kind of fluids, such as: hydraulic oil, fuel, emulsions and liquids in general.

On request

- Version in AISI 316 FT 2221\1



FT 221/1

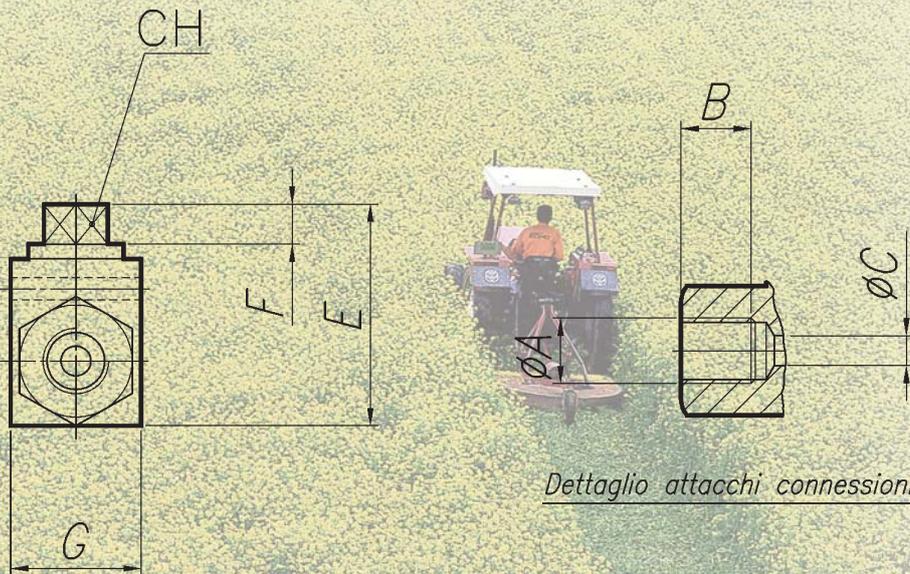

Dettaglio attacchi connessioni

DIMENSIONS

TYPE	DN	PN (BAR)	ØA	B	ØC	D	E	F	G	H	L	M	N	CH	WEIGHT KG	FIXING HOLES ON REQUEST		
																P	Q	ØR
18	4	500	1/8" G	14	5	71	44,5	8	26	37	33,5	13	115	9	0,300	29	27,5	4,5
14	6	500	1/4" G	14	6	71	44,5	8	26	37	33,5	13	115	9	0,374	29	27,5	4,5
38	10	500	3/8" G	14	10	72	50	8	33	43	39	16,5	115	9	0,559	35	35	5,5
12	13	500	1/2" G	16	13	85	51	8	35	48	40	17	115	9	0,655	39	35,5	6,5
34	20	320	3/4" G	18	20	97	71,5	11	50	63	57	24	160	14	1,564	50	49,5	6,5
100	25	320	1" G	20	24	113	76	11	60	67	60	26,5	160	14	2,082	54	54	6,5
114	32	320	1 1/4" G	22	32	110	106	20	78	80	85	35	200	17	2,107	BOREST FIX NOT SUPPLIED		
112	38	320	1 1/2" G	24	38	130	112,5	15	83	85	92	41,5	200	17	3,698	BOREST FIX NOT SUPPLIED		
200	48	320	2" G	28	48	140	132	20	100	100	111	50	200	19	6,070	BOREST FIX NOT SUPPLIED		