



MATERIALS


BODY	CARBON STEEL
CONTROL STEM	CHROME-PLATED STEEL
BALL	CHROME-PLATED STEEL
STEM SEAL	NITRILE
BALL SEAL	PTFE


EXAMPLE FOR ORDERING

CODE	TYPE
FT 221/3	34

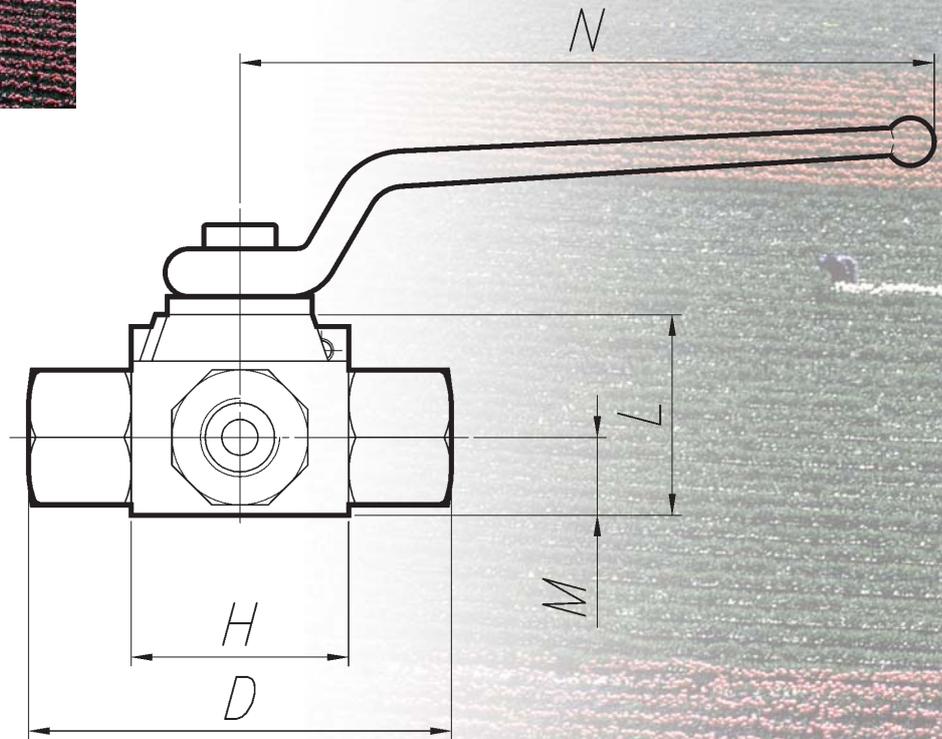

*Dettaglio attacchi
connessioni*

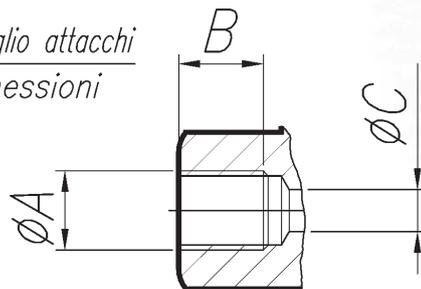



THREE-WAY BALL VALVES

Used to obtain a quick flow shut-off, avoiding noticeable pressure drop, the FT 221/3 ball valves are designed to obtain perfect sealing, easy and quick operation under high pressure conditions.

The noticeable solidity, the material selection and the accurate machining allow their use at working pressure up to 315 bar and with every kind of fluids, such as: hydraulic oil, fuel, emulsions and liquids in general.


Standard version: at L
Requested: at T

On request

- Version in AISI 316 FT 2221\3



TOGNELLA
FT 221/3

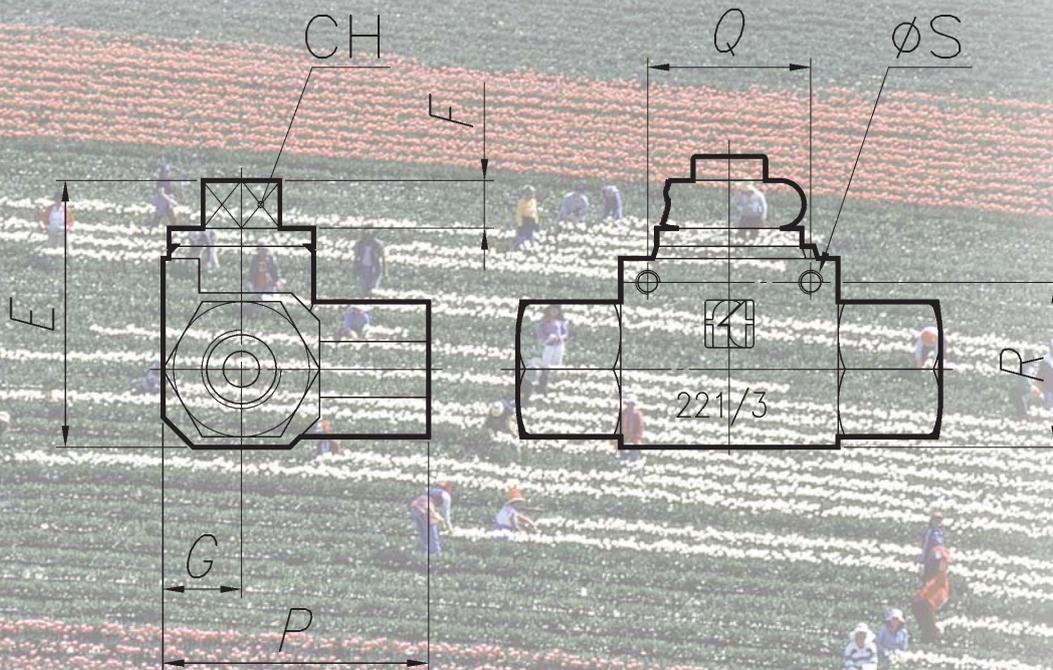

DIMENSIONS

TYPE	DN	PN (BAR)	ØA	B	ØC	D	E	F	G	H	L	M	N	P	CH	FIXING HOLES ON REQUEST		
																Q	R	ØS
18	4	500	1/8"G	14	5	71	44,5	8	13	36	33,5	13	115	44	9	27	27,5	M4
14	6	500	1/4"G	14	7	71	44,5	8	13	36	33,5	13	115	44	9	27	27,5	M4
38	10	500	3/8"G	14	10	72	50	8	16,5	43	39	16,5	115	51,5	9	33	35	M4
12	13	500	1/2"G	16	13	85	51,5	8	17,5	48	40,5	17,5	115	55	9	38	36	M5
34	20	320	3/4"G	18	20	97	72	11	24,5	63	56,5	24,5	160	70	14	50	49,5	M6
100	25	320	1"G	20	24	113	79,5	11	30	67	63,5	30	160	87,5	14	54	54	M6